

OXDALE PRODUCTS



Agricultural, Forestry and Grassland
Machinery Manufacturers and
Suppliers

Brochure 2022



Oxdale Products Ltd

**20-21 Foxwood Road , Off Sheepbridge Lane,
Chesterfield, Derbyshire, S41 9RF**

Oxdale Products was founded in 2008 by Chris Butcher and remains a family run business which is based in Chesterfield, Derbyshire.

Initially, Oxdale focused on the development and production of one product – the TM400 Log Splitter. Following the success of the TM400, which has now sold over 8000 units, Oxdale has expanded and now manufactures more than 10 models of log splitters as well as a large selection of grassland and agricultural machinery.

Our products are manufactured in our factory in Chesterfield, using as much British steel and as many British components as possible, which are then stocked across a wide dealer network throughout the UK. We also display and sell our products at a range of trade shows which we attend on an annual basis.

We pride ourselves on the manufacturing of British products. Guaranteeing high quality products, as well as providing an outstanding level of customer service and aftercare.

Contents

Tractor Mounted Log Splitters	4 -7
PTO Tractor Mounted Log Splitters	8-10
Electric Log Splitters	11-13
Petrol Log Splitters	14-16
Chippers	17-20
Saw Benches	21-22
Rollers	23-25
Chain Harrows	26
Fixed Weeder	27
Folding Weeder	28
Seeder Attachment	29
Post Hole Borer	30
Post Knocker	31
Graders	32-34
Rotavators	35-37
Mowers	38-44
Tipping Trailers	45
Aerator / Slitter	46
Spring Tine Cultivator	47
Subsoiler /Pipelayer	48
3-point linkage Crane	49
ATV Flail Mower / Working Platform	50
Res 10 Back Hoe	51
Pallet Fork Mounted Brushes / Towbar	52
Diesel Heaters	53-54
Towable Spreaders	55

Tractor Mounted Log Splitters



TM400



TM400 Big Base



Double Chamfered Axe Head

All our log splitters are designed, built and tested in the UK. They are suitable for tractors that range from compact models to higher horsepower models.

Easy to split logs at waist height and ground level. Fits to a standard rear 3 point linkage but can be adapted to fit most Avants, and telehandlers .

For added safety, all hydraulic pipes are covered in anti burst lagging.

Both hands are required on the lever to operate the ram.

The big base model also features an enlarged working base perfect for splitting large rounds



TM400 & TM400 Big Base



All companies have a machine which epitomises the success of the business, for Oxdale Products that machine is the TM400, with well over 8000 machines being made since 2008, as well as adding a big base version to the TM400 range.

- Splits logs up to 18" or 45cm
- 10 Ton maximum capacity ram
- Minimum oil flow rate 14L per minute
- Double handle for added safety
- Unique double chamfered axe head
- 20hp minimum



Scan for video

Model	Max Log Length	Max Ton Capacity	Cat Linkage	Min Oil Flow Rate	Machine Weight	Machine Height
TM400	18"	10 Ton	1 & 2	14 L/M	64kg	1320mm
TM400BB	18"	10 Ton	1 & 2	14L/M	80kg	1320mm

TM600



The TM600 is a high capacity log splitter, powerful enough to cope with the most demanding of splitting jobs. For added safety all hydraulics pipes are covered in anti-burst lagging.

- Splits logs up to 24" or 60cm
- Diameter not restricted
- 14 Ton maximum capacity ram
- 25L Per minute oil flow
- Unique double chamfered blade
- Safety double handle



Scan for video

Model	Max Log Length	Max Ton Capacity	Cat Linkage	Min Oil Flow Rate	Machine Weight	Machine Height
TM600	24"	14 Ton	1 & 2	25L/M	100kg	1550mm

TM1000



The TM1000 log splitter has been designed for the professional user who splits large logs into billets. High capacity splitter perfect for medium to large tractors. For added safety all hydraulic pipes are covered in anti-burst lagging.

- Splits logs up to 36" or 90cm
- Diameter is not restricted
- 16 Ton maximum capacity ram
- 30L Per minute oil flow
- Unique double chamfered blade
- Safety double handle



Scan for video

Model	Max Log Length	Max Ton Capacity	Cat Linkage	Min Oil Flow Rate	Machine Weight	Machine Height
TM1000	36"	16 Ton	1 & 2	30L/M	140kg	2350mm

PTO Tractor Mounted Splitters

PTO400



Our PTO range offers a self contained hydraulic system which is ideal for older or smaller tractors that have no free-flowing hydraulic system. Will fit all tractors where a PTO drive is available.

Available with standard or big base.

- Maximum log length 18" or 45cm
- 10 Ton maximum capacity
- Cat 1 or 2 linkage
- PTO pump supplied
- Unique double chamfered axe head
- Standard & big base available

Model	Max Log Length	Max Ton Capacity	Cat Linkage	Min Horsepower	Machine Weight	Machine Height
PTO400	18"	10 Ton	1 & 2	10hp	69kg	1320mm
PTO400BB	18"	10 Ton	1 & 2	10hp	85kg	1320mm

PTO600



The PTO600 has been designed to split logs up to 24" or 60cm. Suitable for 35hp tractors and above. Will fit all tractors where PTO drive is available. The larger base allows large diameter logs to be split with ease.

- Maximum Log Length 24" or 60cm
- 14 Ton maximum capacity
- Cat 1 or 2 Linkage
- Unique double chamfered axe head
- PTO pump
- Double handle for added safety

Model	Max Log Length	Max Ton Capacity	Cat Linkage	Min Horsepower	Machine Weight	Machine Height
PTO600	24"	14 Ton	1 & 2	35hp	210kg	1550mm

PTO1000



The PTO1000 offers all the advantages of the PTO machines but is suitable for bigger tractors, 40hp plus. Ideal for tractors without a free flowing hydraulics system. The PTO1000 is also a professional machine, being able to split logs in billet length.

- 16 Ton maximum capacity
- Splits logs up to 36" or 91cm
- Cat 1 & 2
- Unique double chamfered axe head
- 45l hydraulic tank
- Pipes covered in anti-burst lagging

Model	Max Log Length	Max Ton Capacity	Cat Linkage	Min Horsepower	Machine Weight	Machine Height
PTO1000	36"	16 Ton	1 & 2	40hp	255kg	2350mm

Electric Log Splitters

E300



Oxdale Products' electric splitters are perfect for commercial or domestic users that do not have access to a tractor. The electric range features a single phase electric motor equipped with a standard household 3 pin plug. All our electric machines come with a dual speed hydraulic pump which gives you more power for when the splitting gets tough.

- 10 Ton maximum capacity
- Splits up to 12" or 30cm
- Three pin plug 240V
- Indoor or outdoor use. Showerproof
- Unique double chamfered axe head
- Easily manoeuvrable

Model	Max Log Length	Max Ton Capacity	3 Pin Plug	Machine Weight	Machine Height
E300	12"	10 Ton	Yes	65kg	1060mm

E400



The E400 electric log splitter is a great splitter for domestic and commercial use. The splitter can be used on the ground with the handles at waist height or mounted on a bench in a workshop. The E400 splits logs up to 18" or 45cm and plugs into a standard 3 pin socket. Can be used inside or outside and is showerproof.

- 10 Ton maximum capacity
- Splits logs up to 18" or 45cm
- Dual speed hydraulic pump
- Standard 3 pin plug 240v
- Unique double chamfered axe head
- Easily manoeuvrable

Model	Max Log Length	Max Ton Capacity	3 Pin Plug	Machine Weight	Machine Height
E400	18"	10 Ton	Yes	75kg	1320mm

E400D



The E400D is the perfect, ready to use log splitter with a built in work bench. The built in work bench makes splitting logs for your fire easy. The E400D splits logs up to 18" or 45cm as well as easily plugging into a standard 3 pin plug socket. Can be used indoor or outside and is showerproof.

- 10 Ton maximum capacity
- Splits logs 18" or 45cm
- Dual speed hydraulic pump
- Standard 3 pin plug 240v
- Easily manoeuvrable
- Unique double chamfered axe head

Model	Max Log Length	Max Ton Capacity	3 Pin Plug	Machine Weight	Machine Height
E400D	18"	10 Ton	Yes	100kg	2010mm

Petrol Log Splitters

SE400



The SE400 is a engine driven log splitter powered by a 6.5hp Honda 4-stroke GX200 engine. The SE400 is fitted with a dual speed hydraulic pump which gives you more power when you need it. The large diameter wheels make the machine easy to manoeuvre. A built in work bench allows you to split at waist height. Perfect for working inside or outside.

- Dual speed hydraulic pump
- Unique double chamfered axe head
- 6.5hp Honda GX200 engine
- Splits logs up to 18"
- Diameter of the log is not restricted
- Easily manoeuvrable



Scan for video

Model	Max Log Length	Max Ton Capacity	Petrol Engine	Machine Weight	Machine Height
SE400	18"	10 Ton	Honda GX200 6.5hp	100kg	2010mm

Towable Log Splitters

RT400



The RT400 has the same characteristics as the SE400 but with the benefit of being road towable. The RT400 can be used either attached or free standing. Chassis plated, supplied with fully operational lighting board and mudguards. Fully IVA inspected. Road legal up to 60mph.

- 6.5hp Honda GX200 engine
- Dual speed hydraulic pump
- Unique double chamfered axe head
- Splits logs up to 18"
- Diameter is not restricted
- Big base workbench



Scan for video

Model	Max Log Length	Max Ton Capacity	Petrol Engine	Machine Weight	Machine Height
RT400	18"	10 Ton	Honda GX200 6.5hp	175kg	1900mm

Log Splitter FAQ

Here at Oxdale Products we make a variety of log splitters, no matter your needs. Below are answers to some of the most common questions asked about our splitters.

Will your TM machine work on my tractor?

All our TM machines come with universal fittings on the hydraulic pipes. As long as your tractor has the hydraulic flow required, power and free flow return spool. CAT1 or 2 linkage, our TM will fit your tractor.

Can I have a 4-way splitting blade?

We only do the double chamfered axe head because the shape puts the machines full pressure on a small surface area allowing it to split logs with ease.

What is a dual speed hydraulic pump?

The dual speed hydraulic pump is on all of our electric and petrol log splitters. The pump pushes oil around the machine, however, when the axe hits a very hard lump of wood, the dual speed hydraulic pump increases the pressure to cope with even the most demanding jobs.

Why doesn't your splitter have a auto return ram?

We don't put a auto return on our log splitters as we find it quicker without. You don't have to wait for the ram to go up before you split your next log. You can guess the height and leave the ram in place. Reducing the time it takes to split.

I want the biggest ram possible?

Doesn't everyone?! However this is not always the case, our biggest machines have big rams but they are for splitting logs into billets or for the professional user. They are too powerful for smaller size logs as well as the tractor having to be a lot more powerful.

Do your log splitters have any safety features?

Our log splitters are designed with the users safety in mind. All our splitters come with double safety handles. Two hands have to operate the machine to conform to UK health and safety standards. All machines have anti burst lagging on the hydraulic pipes, self clearing splitting platform and anti slip splitting table.



Scan for video

Del Morino

13hp 3" Chipper



This bio shredder is both reliable and safe. It surpassed all tests to assure the safety of the operator along with excellent chipping ability. 13hp Honda GX390 capable of shredding or chipping up to 3". Quality high strength steel frame, anti-vibration, 5mm thickness laser cut, machine bent and welded by robot.

- "V" belt transmission with tensioner
- Rotor: forced ventilation, steel bearing supports, highly resistant steel shaft.
- 6 swinging reversible blades and 2 blades of highly resistant tempered steel with quick replacement system which is balanced electronically.
- 2 adjustable counter blades, easily replaceable
- Self cleaning screen with longitudinal slots and quick removal system
- Easy to move. Pneumatic tyres on bearings



Del Morino

PTO Chippers 3" PTO



This bio shredder is both reliable and safe. It surpassed all tests to assure the safety of the operator and assure the chipping performance with top marks. The 3" capacity makes short work of branches. Quality steel frame, high strength, anti-vibration, 5mm thickness laser cut, machine bent and welded by robot. Perfect for the domestic or semi professional user.

- "v" belt transmission with tensioner
- Rotor: forced ventilation, steel bearing supports, highly resistant steel shaft
- 6 swinging reversible blades and 2 blades of highly resistant tempered steel with quick replacement system which is balanced electronically
- 2 adjustable counter blades, easily replaceable
- PTO version supplied with category 1 PTO shaft



Scan for video

Oxdel Morino

4.5" Argo



This professional chipper/ shredder, gravity-fed and high-level discharge, reliability and safety are key elements of this machine. High resistant steel frame, cut, bent, and welded by robot.

- 2 belts transmission with screw tensioner
- 3-point hitch, category 4 PTO shaft
- 4 reversible chipping blades of high resistance steel mounted on a ventilated disc
- Quick access to the rotor for easy blades replacement
- Chipper disc has steel bearing supports and is electronically balanced.
- Self-fed (gravity) hopper, chipping disc pulls branches in as it chips, max diameter 10mm (4 inch)
- Material discharge 1.5m (5 foot) high and 360° adjustable

Oxdale Morino

Scorpion 5"



This PTO driven professional chipper with high level discharge, takes logs up to 5" in diameter and is suitable for tractors 20-60hp. Features a no-stress system; automatically adjusts the speed of the feed rollers to deal with larger amounts of material and reduce the stress on the tractor.

- Discharge chute stands 2m high and will rotate 360°
- Comes supplied with a CAT 4 PTO shaft.
- Cuts with 4 reversible blades of high resistance steel, mounted on a ventilated disc. Easy access to blade holder for easy maintenance
- Blade holder disc has a rotor with steel bearing supports and is electronically balanced
- Reliability and safety are the key elements of this machine

Saw Benches

PTO Saw Bench



The Oxdale PTO saw is the perfect saw for the professional or home user. If you have a tractor this is the perfect saw for you. The saw attaches to your 3 point linkage. The 700mm diameter tungsten tip saw blade provides fast and efficient cutting. The saw bench cuts logs up to 12" in diameter and is fully guarded. The bench comes equipped with a swinging cradle, emergency stop lever (for effective and safe operation) and a PTO shaft as standard. We have redesigned the guards to prioritise the safety of the operator.

- Easily cuts 12" diameter logs
- Swinging cradle
- PTO shaft included
- 3-point linkage
- Tungsten tipped blade



Scan for video

Electric Saw Bench



The Oxdale electric saw bench is the perfect piece of equipment for home or semi professional users. The 600mm tungsten tip saw blade is capable of cutting through logs up to 10" in diameter. It features a single-phase electric motor which is designed for safe and effective operation. A single phase, 16-amp power supply is required to power this saw bench.

- 16-amp power supply needed
- Tungsten tipped blade
- 600mm blade
- Easily cuts logs up to 10"
- Swinging cradle

Garden Roller



The garden roller is a smaller, more manageable water ballasted roller. The roller has a diameter of 16" and comes with a 30mm shaft and greaseable bearings which makes it ideal for smallholdings and gardens. It can be towed behind a compact tractor or ATV. When empty it is easily manoeuvrable by hand. It is practical to store and is available with a pin as standard or you can upgrade to a ball hitch.

- Ideal for smallholdings and gardens
- Perfect for compact tractors and ATV's
- Easy to manoeuvre by hand when empty
- Comes with either pin or ball hitch
- Diameter of 16" or 40cm

Width	Drum Diameter	Wall Thickness	Empty Weight kg	Full Weight kg
4ft	16"	5mm	120kg	384kg
5ft	16"	5mm	144kg	464kg
6ft	16"	5mm	185kg	544kg

Paddock Roller



Rolling is used to smooth out uneven surfaces caused by grazing animals and heavy traffic. They can also be used to press uprooted or heaved plants back into the soil to prevent desiccation. Flatter land makes subsequent weed control and harvesting easier. A water filled roller has the advantage that the water may be drained out for lighter use or for transport. Pin as standard or you can upgrade to a ball hitch.

- Water ballasted
- Fitted with pin or ball hitch
- Fully adjustable rear scraper
- 22" Diameter
- 3-point linkage available as a optional extra

Width	Drum Diameter	Wall Thickness	Empty Weight kg	Full Weight kg
4ft	22"	7mm	170kg	500kg
5ft	22"	7mm	200kg	600kg
6ft	22"	7mm	252kg	700kg
8ft	22"	7mm	304kg	800kg

Farmland Roller




A water-filled roller has the advantage that the water may be drained out for lighter use or for transport. In frost-prone areas a water filled roller must be drained for winter storage to avoid breakage due to the expansion of water as it turns to ice.

- The farmland roller is water ballasted which makes it ideal for large areas
- Fitted with an agricultural towing eye and can only be towed behind an agricultural machine
- An optional 3-point linkage frame is also available for this roller.
- 3-point linkage as shown for easy transportation without ballast
- All roller drums are pressure tested

Width	Drum Diameter	Wall Thickness	Empty Weight kg	Full Weight kg
8ft	30"	10mm	710kg	1850kg

Chain Harrows



Our range of trailed and mounted chain harrows are designed to cover all applications from farms, small holding, equestrian venues and sports fields.

Harrowing removes the dead thatch lifts vegetation up and levels any mole hills. It allows air movement and root aeration which helps the soil to breathe and improves water infiltration. It reduces disease by exposing fungi and bacteria to sunlight which is essential for the health of the pasture.

- 3-way matt on all 4ft, 6ft & 8ft harrows
- Mounted or trailed
- Available in 4ft, 6ft, 8ft, 12ft

Width	Trailed	Mounted	3 Way Matt	Cat Linkage	Tine Thickness
4ft	Yes	Yes	Yes	1 & 2	12mm
6ft	Yes	Yes	Yes	1 & 2	12mm
8ft	Yes	Yes	Yes	1 & 2	12mm
12ft	No	Yes	No	1 & 2	12mm

Fixed Weeder Tine



Scan for video



The Oxdale fixed weeder grass harrow has revolutionised grass harrowing in recent years. The larger working widths, more adjustment and more aggressive spring tines mean that a better finish can be achieved faster and at a lower cost.

- 4ft , 6ft, 8ft
- Fitted with 8mm tines
- The machines are designed for strength without the need for high horsepower.
- The weeder can also be used with the Oxdale seeder attachment

Width	Tines	Rows of Tines	Min hp	Cat Linkage
4ft	21	3	10hp	1
6ft	31	3	15hp	1
8ft	41	3	20hp	1

12ft Folding Weeder



The Oxdale folding 12ft weeder tines has revolutionised grass harrowing in recent years, larger working widths, more adjustment and aggressive spring tines mean that a better finish can be achieved faster and at a lower cost.

Designed for tractors of 30hp and above, it features 4 rows of 8mm tines for optimum ground clearance.

It folds to a width of 4ft (1.2m) making it ideal for narrow gateways and road travel.

- Suitable for tractors of 30hp and above.
- Four rows of tines for optimum ground clearance
- Folds to a width of 4ft or 1.2m making them ideal for narrow gateways and road travel.



Scan for video

Width	Tines	Rows of Tines	Min hp	Cat Linkage
12ft	72	4	30hp	1 & 2

Seeder Attachment



The Oxdale seeder attachment can be attached to any Oxdale weeder tine or any vehicle with a 12v power supply.

- 62L capacity hopper with stainless steel blades and a 12v motor
- Variable speed control for the spread and consistency. The spread width ranges from 5ft-45ft (1.5m - 13m).
- Stimulates old grass growth to improve yields over seeding
- Creates a completely new ley
- Can be used to spread seed, fertiliser, slug pellets, granular pesticides, herbicides and fungicides.

Post Hole Borer



The post hole borer is available with 4, 6, 9 or 12 inch augers. It is capable of boring holes up to 3ft deep, at 540 rpm and comes complete with a PTO shaft.

- Suitable for tractors up to 60hp
- Can be fitted with our 4, 6, 9 or 12 inch diameter augers
- Bores holes up to 3 foot deep
- Works at a maximum of 540 PTO rpm
- Installed with a shear bolt to prevent damage to the machine
- Comes with a PTO shaft
- Augers available separately



Scan for video

Postknocker



Scan for video

Our Post Knocker is suitable for use with all tractors.

It has a 60kg (max) weight block which can be reduced by removing leaves.

The post knocker requires a hydraulic spool connection. It can be used with CAT1 or CAT 2 linkage and is equipped with a levelling adjuster and post handling plate.

- Suitable for smaller tractors
- 60kg weight block
- Levelling adjuster
- Post holding plate
- Single acting ram
- Only requires 1 hydraulic spool connection
- CAT 1 or 2 linkage



Model	Weight block	Cat Linkage	Overall Weight
OXPK	60kg	1&2	100kg

Compact Grader Boxes



An essential tool for levelling ground. The compact grader is ideal for use on hardcore tracks, spreading soil and rubble.

The tines loosen the material, which is then dragged into the box, dropping out where the ground is lower leaving a level surface.

- All sides are 6mm in thickness
- We take our side walls to a straight end finish
- All grader boxes are fitted with front and rear reversible wear plates.
- One row of adjustable tines
- Available in 4ft, 5ft, 6ft



Scan for video

Width	Ripper Legs	Blades	Wall Thickness	Weight	Cat Linkage
4ft	4	2	6mm	120kg	1
5ft	5	2	6mm	150kg	1
6ft	6	2	6mm	180kg	1 & 2

Medium Duty Grader Boxes



This grader was developed for users with medium HP tractors.

The medium duty grader will stand higher than the standard with 10mm thick steel sides. The back of the machine is made from one piece of sheet metal with added strengthening.

There is a full width box section crossmember with adjustable tines to loosen the surface.

- Same head stock as the heavy duty grader
- Adjustable and removable legs
- Reversible tines
- Cat 2 linkage
- Available in 6 and 8 foot lengths



Scan for video

Width	Ripper Legs	Blades	Wall Thickness	Weight	Cat Linkage
6ft	6	2	10mm	450kg	2
8ft	8	2	10mm	550kg	2

Heavy Duty Grader Boxes



Heavy duty design. Ideal for use on farm tracks and drives. Durable tines easily break up the ground surface. Debris is dragged in the box to where the ground is lower where it is deposited. Rear blades level and grade the ground surface.

- Reversible rear blade
- Adjustable leg height
- Available in 6ft, 8ft and 10ft models
- Replaceable & reversible Tines
- Reversible side plates



Scan for video



Width	Ripper Legs	Blades	Wall Thickness	Weight	Cat Linkage
6ft	5	2	15mm	690kg	2
8ft	7	2	15mm	890kg	2
10ft	7	2	15mm	1112kg	2

Del Morino

Rotavators Del Morino Thunder



The Del Morino rotavators are easy to use and are a powerful piece of machinery used to carry out all the functions related in various working environments in all types of ground whatever its composition (sandy soil, medium mixture or clay)

The rear baffle (back door) besides preventing any dangerous hurling of stones and other foreign bodies, makes a clod mincing function, the more emphasized the more the baffle is closed.

- 3-point hitch, cat 1
- Cast iron gearbox
- Adjustable skids
- Universal PTO, CAT 4
- Rotor with 4 hoes per flange



Scan for video

Model	HP	Cat Link	Machine Width CM	Blades	Weight kg
105	15-20	1 & 2	120cm	20	166kg
125	20-30	1 & 2	140cm	24	180kg
145	30-40	1 & 2	160cm	28	195kg

Del Morino

186 URT-HF



This machine demonstrates Del Morino's experience in both the quality of construction and the final result in the field. It is suitable for the professional farmer working in open fields.

- Suitable for heavy work
- Universal PTO shaft: CAT 5, with slip clutch
- Cast iron gearbox delivering 540rpm
- 6 hoes per flange
- Chain driven ASA 100 in oil bath with automatic tensioner
- Automatic tensioner, adjustable skids
- Reinforced 3 point linkage frame



Scan for video

Model	HP	Cat Link	Machine Width CM	Blades	Weight kg
186	40-70	2	200cm	40	330kg

DelMorino

Eagle



This rotary tiller combines style, functionality and power to break up the ground. Easy to use and a powerful piece of machinery used to carry out all the functions related in various working environments in all types of ground whatever its composition (sandy soil, medium mixture or clay).

- 3 point hitch, category 1
- One piece, 4 mm steel frame
- Cast iron gearbox 540 rpm
- Rotor with 4 hoes per flange
- Side shift through moveable 3 point hitch couplings
- Adjustable skids
- Universal PTO shaft category 4





Mowers

Finishing Mowers



The Del Morino Finishing Mower with belt drive is suitable for tractors which are 12-70hp with CAT1 three-point linkage. The cast iron gearbox with free wheel produces 540rpm. The mower is supplied with a universal PTO shaft CAT2.

- Rear discharge.
- Side discharge on the SRM120
- 3 rotors with 1 blade each (235 5 rotors with one blade each)
- Optional mulching system
- Optional anti-scalp roller (standard on the XRM235)
- Adjustable pivoting wheels



Scan for video

Model	HP	Blades	Cut Width	Machine Width CM	Weight kg	Belts
120	12-20	3	120cm	145cm	180kg	2
150	20-30	3	150cm	160cm	212kg	2
180	30-40	3	180cm	190cm	239kg	2
215	40-55	3	215cm	225cm	289kg	2
235	55-70	5	235cm	245cm	320kg	2

Del Morino

Semi Offset Flail



The Del Morino Semi Offset Flail Mower is suitable for tractors which are 12-30hp with CAT1 three-point hitch and manual side shift (standard headstock on the 106). The mower can work close to hedges and under trees, cut grass, weeds and bushes.

- Available in 1.06m, 1.32m and 1.58m widths
- Adjustable rear roller (3 positions)
- Universal PTO shaft CAT2
- Aluminium gearbox delivering 540rpm with a free wheel device
- Two belt transmission with adjustable tensioner
- Rotor with metal spatula flails as standard
- Adjustable cutting height



Scan for video

Model	HP	Blades	Cut Width	Machine Width CM	Weight kg	Belts
106	12-20	16	106cm	120cm	146kg	2
132	20-25	20	132cm	155cm	170kg	2
158	25-30	24	158cm	180cm	196kg	2

Del Morino

Heavy Duty Flail



The Del Morino heavy duty flail mower is suitable for 25-70hp tractors with CAT1 or 2 three-point hitch. The HD Flail supplied with a universal CAT4 PTO shaft.

- 1.32m, 1.58m, 1.86m and 2.14m widths available
- Full width hydraulic headstock available on all models (standard on the 2.14)
- Cast iron gearbox with a free wheel device
- Three belt drive with adjustable tensioner
- Rotor with heavy duty hammers
- Adjustable rear roller
- Adjustable skids



Scan for video

Model	HP	Blades	Cut Width	Machine Width CM	Weight kg	Belts
132	15-25	20	132cm	155cm	255kg	3
158	25-40	24	158cm	180cm	288kg	3
186	40-55	28	186cm	205cm	324kg	3
214	55-75	32	214cm	230cm	438kg	3

Del Morino

Levante Flail



The Levante is suitable for heavy duty use on hard and uncultivated soils. The honeycomb structure with high thickness allows you to cut bushes and pruning of big diameter shrubs getting excellent results. The Levante flail mower is suitable for 80-120hp tractors with CAT2 3-point linkage. The Levante mower is supplied with a universal CAT6 PTO shaft, hydraulic side shift as standard.

- Available sizes 190cm, 250cm, 270cm
- Transmission with 4 heavy duty belts and tensioner
- Rotor supports and bearings outside mulching chamber
- Dual shredding blade for extra mulching
- Adjustable skids and rear roller
- Hammer flails as standard



Scan for video

Model	HP	Blades	Cut Width	Weight kg	Belts
190	60-80+	28	190cm	565kg	4
250	80-100+	36	250cm	600kg	4
270	100-120+	38	270cm	680kg	4

Del Morino

Levante Super




Scan for video



The Levante Super has all the characteristics as the standard Levante. This machine is suitable for heavy duty use on hard and uncultivated soils for the professional user. The honeycomb structure with high thickness cover and walls (side walls 10mm) allows the user to cut grasses, bushes, stubble, reeds and even pruning of big diameter saplings. Hydraulic side shift adjustment which enables the user to not just shift the machine to the left or right but also have optimal control on embankments and slopes.

- Highly manoeuvrable and can be used as an in-line flail mower behind the tractor, or fully offset to the right, with a cutting angle between -50 and +90 degrees of horizontal


cm	160	190	220
A	85	85	85
B	106	132	158
C	191	217	243
D	194	194	194
E	229	255	281
F	135	135	135

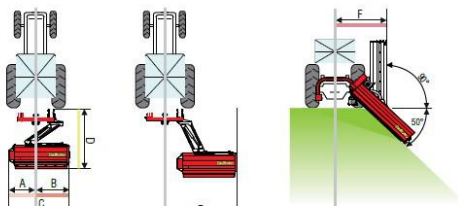

Model	HP	Blades	Cut Width	Weight kg	Belts
220	80+	32	220cm	795kg	4

Oxdel Morino




Centurion Super

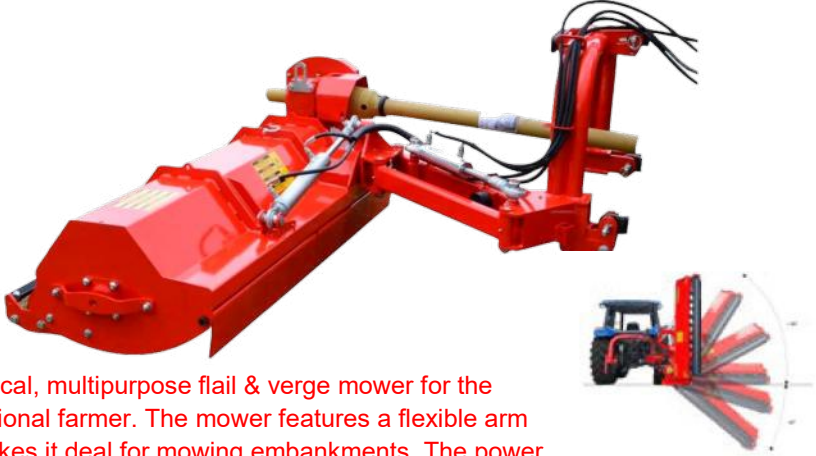

A practical, multipurpose flail & verge mower for the professional farmer. The mower features a flexible arm that makes it ideal for mowing embankments. The power transmission system is the best available and is suitable for tractors up to 70 HP.

- 3 point hitch category 1 and 2, with hydraulic side shift
- 540 rpm with free wheel device
- 3 Belt drive transmission with screw adjustable tensioner
- Rotor with hammers
- Adjustable rear roller
- Universal PTO shaft category 4 included

cm	106	132	158
A	60	60	60
B	95	121	147
C	155	181	207
D	148	148	148
E	188	214	240
F	100	100	100





DMK Topper



The DMK range of grass toppers are a strong, simple and efficient way of keeping grass areas neat and tidy with a good performance cut. They are very economic to purchase and maintain. The machine is connected to the tractor with a 3-point hitch which can be used in an 'offset position' to make it easier to use under trees and along wall sides.

- 15 – 80 HP
- Three-point hitch, category 1 (DMK 100-120) and cat 2 (DMK 180) all with manual side shift
- Cast iron gearbox 540 rpm, direct drive.
- Ideal for compact and low horsepower tractors
- Rotor with 2 swinging blades
- Hinged rear flap facilitates grass expulsion
- Reversible and adjustable skids



Scan for video

Model	HP	Cutting Height CM	Cutting Width	Blades	Weight KG
DMK100	12+	2.5-10cm	100cm	2	145kg
DMK120	25+	2.5-10cm	120cm	2	180kg
DMK180	40+	2.5-10cm	180cm	2	350kg

Tipping Trailer



Our Tipping Trailer is suitable for use with 20hp tractors and above. The trailers have drop down sides, are unbraked and suitable for off road use only. The trailer is equipped with a 3-stage hydraulic ram and 23×10.5-12 flotation tyres. An optional hydraulic hand pump is available.

- 1.5 and 2 tonne tipping trailers for tractors with 20hp plus
- Ideal for horse manure and soil
- Removable sides
- Available in a variety of colours
- Available with mesh sides
- Off road use only



Model	Length CM	Width CM	Height CM	Load Capacity	Mesh Sides	Drop Sides
OX1500	184cm	128cm	102cm	1.5 Ton	Optional Extra	Yes
OX2000	229cm	128cm	102cm	2.0 Ton	Optional Extra	Yes

Slitter/Aerator



The Oxdale Slitter relieves compaction and promotes a healthier root system. It can reduce the need to purchase expensive artificial fertiliser. Alongside this, the slitter improves growth and the quality of grass. It improves drainage whilst simultaneously maximising fertiliser input and eliminating slurry run off. Water ballasted for extra weight.

- Available 4ft, 5ft, 6ft, 8ft and 10ft
- Single rota on the 4ft, 5ft, 6ft compact models with multi position bearings
- Twin rota with multi position bearings on the heavy duty slitter

Range	Width ft	Blades	Cat Link	Weight KG	Ballasted Weight KG
Compact	4"	18	1	190kg	410kg
Compact	5"	24	1	238kg	515kg
Compact	6"	27	1	285kg	615kg
Farmer	8"	36	2	870kg	1690kg
Farmer	10"	48	2	1087kg	2112kg

Spring Tine Cultivator




The spring tine cultivator is an excellent tool for aerating the soil and uprooting weeds. These cultivators are perfect for vineyards, orchards, pastures and general field work. Three ranks of vibrating spring tines break the entire surface to provide the soil with air for faster warm-up and quicker germination.

- Suitable for tractors as low as 10 HP
- Available in widths of 4, 6 and 8 foot
- Easy to adjust, move and remove coulters, which enables the cultivator to be front or rear mounted
- Any number or configuration of coulters available for individual requirements

Width feet	Cat Link	Crumbler	Min HP	Tines
4"	1 & 2	Optional	10hp	9
6"	1 & 2	Optional	15hp	13
8"	1 & 2	Optional	20hp	18

Subsoiler/Pipelayer

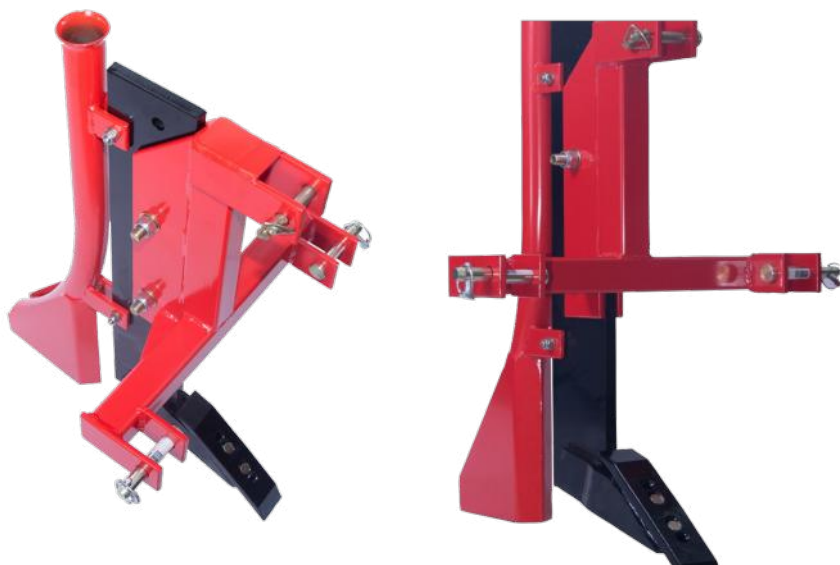

Suitable for smaller tractors and comes supplied with a pipe and cable laying attachment for fast installation with minimal disruption.

The machine allows for the removal of a compacted soil pan from an area of ground to aid drainage.

- Features depth adjustment technology and a reversible point.
- Lays flexible pipe or cable up to 4.5cm
- The subsoiler can go down up to 24" or 60cm
- Depending on the power of the tractor and soil type. Usual operating depth is around 18"

3-Point Linkage Crane & Log Grabs



3-point linkage crane

- 1 Ton lifting capacity
- 1.8m Lifting height
- Ideal for lifting or moving heavy objects
- Log grabs & crane sold separately

Log Grabs

- Easier to manoeuvre logs
- Available in different sizes
- All log grabs are CE marked
- 420mm or 600mm
- Work great with our 3 point linkage crane
- Log grabs & crane sold separately



Working Platform

To go on the pallet forks of a tractor or telescopic handler.

- Minimum truck capacity 1.5 tonnes
- Conforms to HSE guidance note PM28 3rd edition
- Safety retaining band behind forks
- Folding finger guard mesh back panel
- Self locking automatic return
- Inward opening gate
- Top safety hand rail, intermediate rail and kick plate all around
- Non-slip chequer plate flooring



Width mm	Height mm	Length mm	Unladen Weight kg	Max Load kg
1250mm	2400mm	1000mm	180kg	500kg

Engine Driven ATV Flail

The engine driven ATV Flail mower is available in a 1.2m cutting width. They are driven solely by an electric start, 15hp engine.

- 15hp engine which makes them perfect for use with a ATV
- The ATV flail has wide set tyres for reduced ground compaction and are designed to cut long overgrown grass



Del Morino

Res 10 Back Hoe




Technology, design and long life add value to this back hoe. It is a leader in the small and medium size digging equipment market from 10-35 HP.

Standard Features

- 3-point hitch, category 1 and 2
- PTO driven hydraulic pump with gearbox for 540 rpm
- Independent hydraulic system and hydraulic oil tank with 13 litres oil capacity
- 6 Hydraulic cylinders
- Adjustable tilt seat
- Bucket included in the price
- 3-point stabilizer kit

TYPE						
COD-MOD	HP	HP	cm	in	kg	lbs
RES 10	10 - 35	EXL 25	110	44"	246	542



A	220	D	190
B	160	E	40
C	230	F	30

Pallet Fork Mounted Brushes



- Fork arm mounted brush enables easy sweeping over large areas
- Durable and long lasting bristles made from polypropylene plastic
- Retains bulk volumes of solid or liquid material
- 4ft, 6ft and 8ft sizes available

Oxdale Towbars

The Three Point Linkage Tow Bar is ideal for moving trailers and caravans behind the tractor. It is available in CAT1 or CAT2 linkage and can be fitted with either a ball or pin hitch. For offroad use only.

- Ideal for moving trailers and caravans around behind the tractor with ease
- Available in cat 1 or 2 linkage
- Available with either a ball or a pin hitch adaption
- 4 sizes available, towbar & ball (small), towbar, ball & hitch (small), towbar & Ball (large), towbar, ball & hitch (large)



Diesel Heaters

With the advanced burner system, this diesel heater has a patented oil burner with an electric fuel pump that circulates the combustion gases through pipelines with ceramic coating and creates heat as infrared radiation.

The triple combustion process ensures complete and clean combustion. Normal ventilation is sufficient.

- The AH-200i is suitable for spaces up to 900m³
- The AH-300i is suitable for spaces up to 1500m³
- The AH-800i is suitable for spaces up to 2000m³



Scan for video

New Features;

- Wi-Fi or 4G connection
- Automatic restart after power outage
- Redesigned burner, piping and protective grid
- Stylish dark graphite grey colour
- Heater with remote control




The diesel heaters can be controlled remotely from anywhere in the world via the app. In the app, you can see in real time, the temperature of the heated space, the amount of fuel and whether the heater is running.



No smell



Low consumption



No Exhaust



No Fan




Temperature

0-40°



Bio diesel, red or

standard diesel



Castor wheels



Quiet only 48db

COMPARISON TABLE

		AH-200i	AH-300i	AH-800i
Heating Capacity	kW/h	13	15	22
Suitable for spaces up to	m ³	900	1500	2000
Fuel consumption (continuous heating)	L/h	0,95 - 1,14	1,05 - 1,24	1,71 - 1,9
Fuel		Biodiesel, Diesel, Red Diesel		
Fuel tank volume	l	25	45	70
Fuel heating		●	●	●
Power consumption		Ø 1 x 230V x 50Hz		
Power consumption	W	80W		
Temperature adjustment range	°C	0-40		
Noise level	dB	48		
Dimensions (W x D x H)	cm	78 x 30,5 x 94,5	95 x 30,5 x 101	130 x 35 x 134
Weight	kg	40	46	81
Spare parts warranty		●	●	●
Compliant with the EU's emissions regulations		●	●	●
Wi-Fi (4G-connection option)		●	●	●

Towable Spreaders

Small Spreader

- Suitable to spread salt, fertiliser and seed
- Adjustable tow bar with 50mm ball hitch
- Heavy duty cast iron oil bath gearbox
- 15 inch tread turf tyres
- Comes with rain cover
- Can be towed with ATV or 4x4
- 60kg, 132lb capacity



Large Spreader


- 158kg/ 350lb capacity hopper
- Suitable to spread salt, seed and fertiliser
- Adjustable tow bar with 50mm ball hitch
- Heavy duty cast iron gearbox
- Pneumatic wheels
- Can be towed with ATV or 4x4



All product prices and specifications are subject to change. Unfortunately this is because of the uncertainty in the marketplace

Oxdale Products

B U I L T I N T H E U K

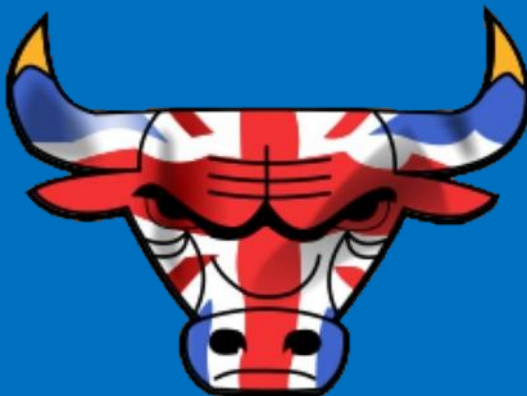

Units 20-21 Foxwood Road, Chesterfield, Derbyshire, S41 9RF

Tel: 01246 529020

Email: sales@oxdaleproducts.co.uk

For Northern Ireland and Eire contact

William Holmes

Warringview, 21 Newline, Waringstown, Co.Armagh,

N.Ireland, BT66 7RY

Mobile: 07792658445

Email: info@holmesagricandforestry.co.uk

www.oxdaleproducts.co.uk